

## Change de front red lever


### 1. Material and tools

#### Material :

- Red lever
- Rivet 26 mm
- Nail 3mm

#### Tools :

- A drill of 4 mm
- Pin hunter 3 mm
- A pair of plier

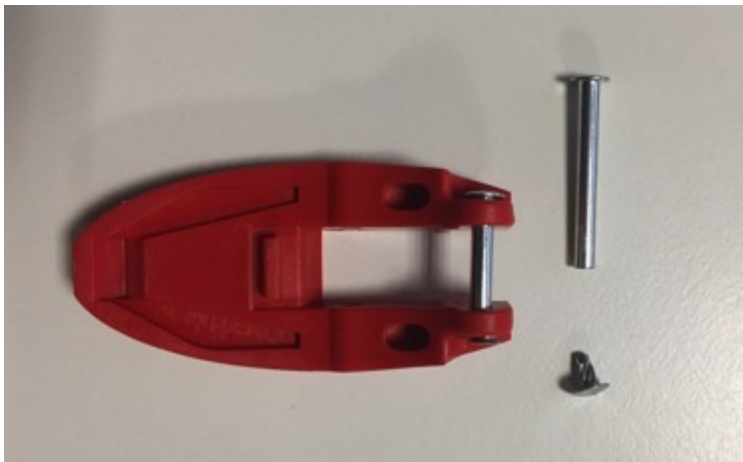

### 2. How to change the red lever

#### a) Remove the old red lever

You can use a drill to remove the riveting. You can even break the old lever to simplify the operation. You can also use a pin hunter to remove the old rivet.



The riveting remove by drilling

## Procédure interne THE M Equipment – Change the front lever

### b) Place the new front lever and the rivet

Place the new front lever and put the 26mm rivet.



Notice that the rivet is just align with the red lever

### c) Press the new nail

Press the ail into the rivet with a pair of pliers



Press the nail



After pressing

Try the functions of the red lever. Do not forget to put the shoes into the lowtech to test the touting mode